
# VISO 3 SP MINI 2F



## Technical drawings

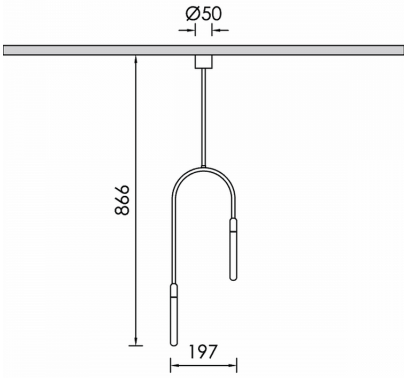


## Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

### General Information

| | |
|---|---|
| Housing | Metal |
| Product code | DES0346CL109ON |
| Product family | VISO |
| Diffuser | Opal PMMA |
| Control Gear | Built-in ECG |
| Options for Dimming Control | On-Off |
| Length | 197 mm |
| Height | 866 mm |


### Electrical data

| | |
|---|---|
| Consumption | 2.2 W |
| Performance | 107.73 lm/W |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 230 V |

### Luminaire Output

| | |
|---|---|
| Beam Type | VW |
| Luminous Flux | 237 lm |
| CRI CCT | 930 |

### Light distribution



### Safety characteristics

| | |
|---|---|
| IK | 07 |
| IP | 40 |
| Protection Class | Class I |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >50.000h L80B10 |