
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VISO FLEX



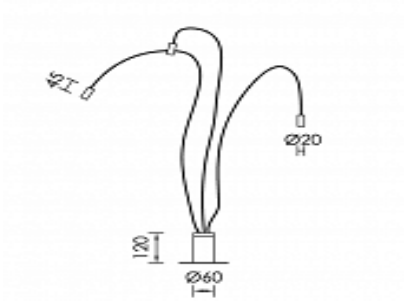

Product Details

CE LM80 Source Type H.P. LED

General Information

Housing	Brass
Product code	BO0432CL001ON
Product family	VISO
Diffuser	PMMA lenses
Control Gear	Built-in ECG
Height	
Diameter	60


Electrical data


Consumption	3.36
Performance	116.43
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	W
Beam	45º
Luminous Flux	391.2
CRI CCT	940

Light distribution





Safety characteristics

IK	04
IP	65

Temperature Operating Conditions

Lifetime	>50.000h L80B10