
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VISO FLEX



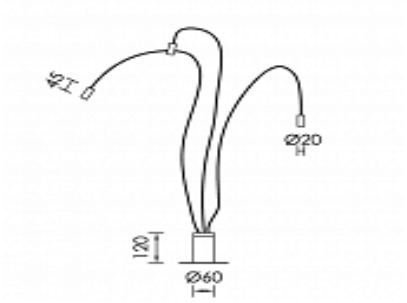

Product Details

CE LM80 Source Type H.P. LED

General Information

Housing	Brass
Product code	BO0433CL109ON
Product family	VISO
Diffuser	PMMA lenses
Control Gear	Built-in ECG
Height	
Diameter	60


Electrical data


Consumption	4.86
Performance	96.23
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	UN
Beam	8º
Luminous Flux	467.7
CRI CCT	927

Light distribution





Safety characteristics

IK	04
IP	65

Temperature Operating Conditions

Lifetime	>50.000h L80B10