
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

PALIO 1 L LED FROSTED



Technical drawings

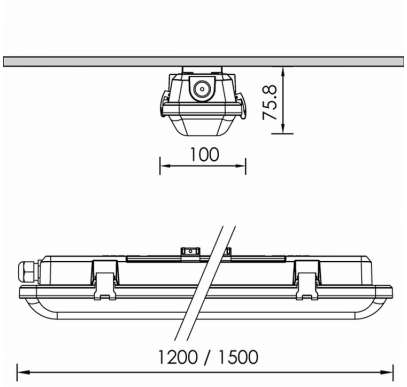

Product Details

CE LM80 Source Type Linear LED

General Information

Housing	ABS
Product code	CM0624DAC
Product family	PALIO
Diffuser	Frosted UV-resistant polycarbonate
Control Gear	Built-in ECG
Options for Dimming Control	DALI2
Options for Wireless Dimming	Casambi
Width	100 mm
Length	1200 mm
Height	75.8 mm


Electrical data


Consumption	17 W
Performance	152.94 lm/W

Luminaire Output

Luminous Flux	2600 lm
CRI CCT	940

Light distribution





Safety characteristics

IK	08
IP	65

Temperature Operating Conditions

Lifetime	>80.000h