
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

SOLUS 2



Technical drawings

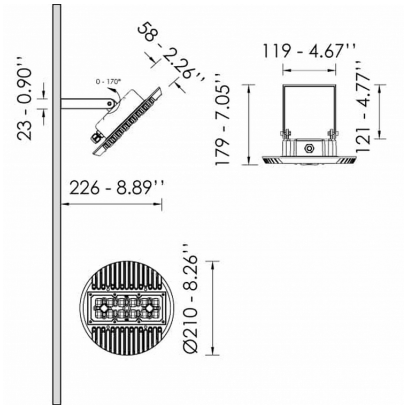

Product Details

CE

Source Type SMD LED

General Information

Housing	Aluminium
Product code	PJ0537CL001DA
Product family	SOLUS
Control Gear	Built-in ECG
Options for Dimming Control	DALI2
Height	58 mm
Diameter	210 mm

Electrical data

Consumption	13 W
Performance	148.46 lm/W
Ripple	3

Luminaire Output

Beam Type	ASY
Beam	30x115º
Luminous Flux	1930 lm
CRI CCT	840

Light distribution

Safety characteristics

IK	08
IP	65

Temperature Operating Conditions