
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

MINOR 1F LED



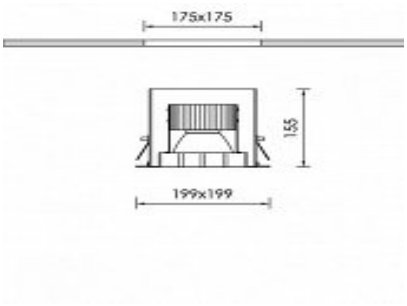

Product Details

CE LM80 LM79 TM21 REACH Source Type COB LED

General Information

Housing	Metal
Product code	DL5480CL001DAC
Product family	MINOR
Diffuser	Clear Polycarbonate
Control Gear	Remote Electronic Driver
Width	199
Length	199
Height	155


Electrical data


Consumption	37.916666666667
Performance	107.83
Ripple	3

Luminaire Output

Beam Type	M
Beam	24º
Luminous Flux	4088.9166666667
CRI CCT	927

Light distribution





Safety characteristics

IK	07
IP	20

Temperature Operating Conditions