

# MOBILIS SQUARE LED

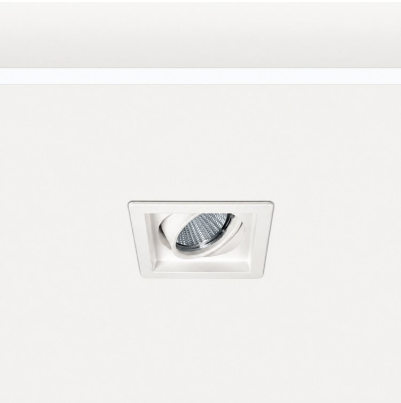

## Technical drawings

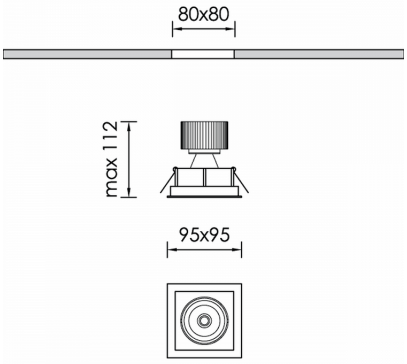


## Product Details

CE LM80 LM79 TM21 REACH Source Type COB LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | DL5506CL007DAC |
| Product family | MOBILIS |
| Diffuser | Safety Glass Clear |
| Control Gear | Remote Electronic Driver |
| Options for Dimming Control | DALI2 |
| Options for Wireless Dimming | Casambi |
| Width | 95 mm |
| Length | 95 mm |
| Height | 112 mm |


### Electrical data

| | |
|---|---|
| Consumption | 8.3 W |
| Performance | 105.78 lm/W |
| Ripple | 3 |

### Luminaire Output

| | |
|---|---|
| Beam Type | N |
| Beam | 18º |
| Luminous Flux | 878 lm |
| CRI CCT | 930 |

### Light distribution




### Safety characteristics

| | |
|---|---|
| IK | 03 |
| IP | 20 |
| Protection Class | Class III |

### Temperature Operating Conditions