
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

RITUS 70 SPOT



Technical drawings

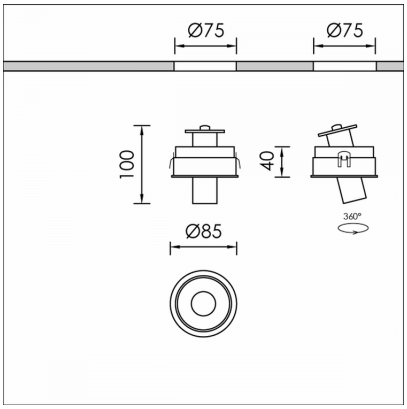

Product Details

CE

Source Type COB LED

General Information

Housing	Aluminium
Product code	DL5599CL001DA
Product family	RITUS
Control Gear	Remote Electronic Driver
Options for Dimming Control	DALI2
Height	100 mm
Diameter	85 mm


Electrical data

Consumption	4.8 W
Performance	78.33 lm/W
Ripple	3

Luminaire Output

Beam Type	N
Beam	15º
Luminous Flux	376 lm
CRI CCT	927

Light distribution



Safety characteristics

IK	04
IP	54

Temperature Operating Conditions