
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

# RITUS 70 SPOT



## Technical drawings

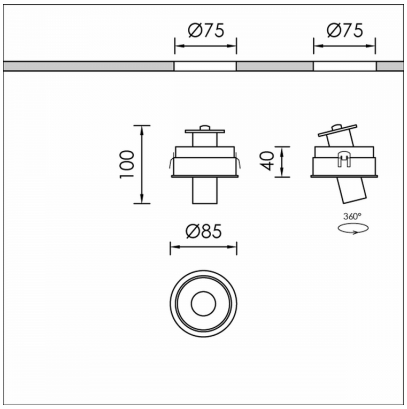


## Product Details

CE

Source Type COB LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | DL5599CL001DAC |
| Product family | RITUS |
| Control Gear | Remote Electronic Driver |
| Options for Dimming Control | DALI2 |
| Options for Wireless Dimming | Casambi |
| Height | 100 mm |
| Diameter | 85 mm |


### Electrical data

| | |
|---|---|
| Consumption | 4.8 W |
| Performance | 78.33 lm/W |
| Ripple | 3 |

### Luminaire Output

| | |
|---|---|
| Beam Type | N |
| Beam | 15º |
| Luminous Flux | 376 lm |
| CRI CCT | 927 |

### Light distribution




### Safety characteristics

| | |
|---|---|
| IK | 04 |
| IP | 54 |

### Temperature Operating Conditions