HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

RITUS 70 SPOT



Technical drawings

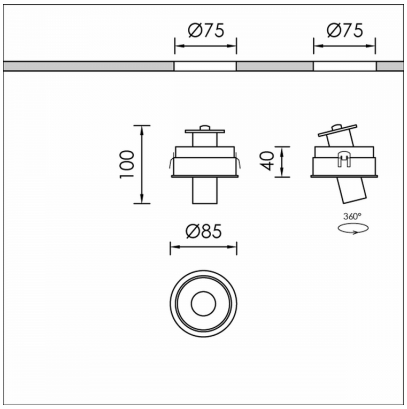

Product Details

CE

Source Type COB LED

General Information

Housing	Aluminium
Product code	DL5601CL001DAC
Product family	RITUS
Control Gear	Remote Electronic Driver
Options for Dimming Control	DALI2
Options for Wireless Dimming	Casambi
Height	100 mm
Diameter	85 mm

Electrical data

Consumption	4.8 W
Performance	78.33 lm/W
Ripple	3

Luminaire Output

Beam Type	W
Beam	36º
Luminous Flux	376 lm
CRI CCT	927

Light distribution



Safety characteristics

IK	04
IP	54

Temperature Operating Conditions