HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

RITUS 70 SPOT



Technical drawings

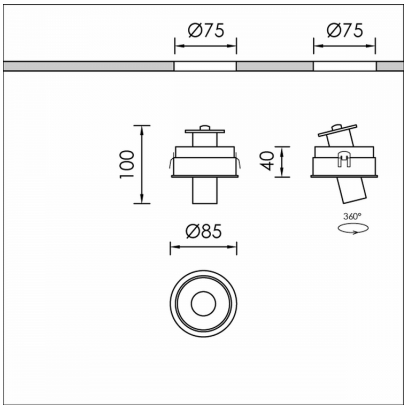

Product Details

CE

Source Type COB LED

General Information

Housing	Aluminium, Plastic
Product code	DL5603CL001DAC
Product family	RITUS
Control Gear	Remote Electronic Driver
Options for Dimming Control	DALI2
Options for Wireless Dimming	Casambi
Height	100 mm
Diameter	85 mm

Electrical data

Consumption	4.8 W
Performance	83.33 lm/W
Ripple	3

Luminaire Output

Beam Type	UN
Beam	10º
Luminous Flux	400 lm
CRI CCT	930

Light distribution



Safety characteristics

IK	04
IP	54

Temperature Operating Conditions