
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

BRUTUS M



Technical drawings

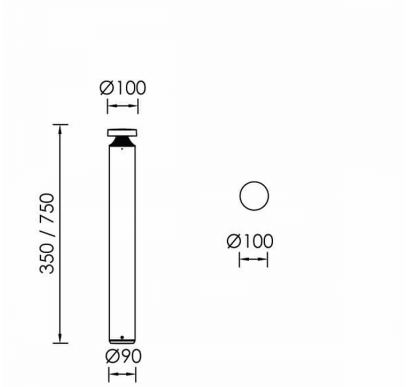

Product Details

CE

Source Type SMD LED

General Information

Housing	Aluminium
Product code	BO0456CL001DAC
Product family	BRUTUS
Control Gear	Built-in ECG
Options for Dimming Control	DALI2
Options for Wireless Dimming	Casambi
Height	350 mm
Diameter	100 mm


Electrical data

Consumption	12 W
Performance	50.67 lm/W
Nominal Voltage	230 V

Luminaire Output

Luminous Flux	608 lm
CRI CCT	830

Light distribution



Safety characteristics

IK	10
IP	65

Temperature Operating Conditions