
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

NINIO 2 OPAL LINEAR LED



Technical drawings

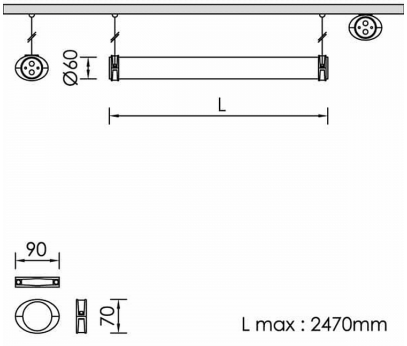

Product Details

CE LM80 Source Type Linear LED

General Information

Housing	PMMA
Product code	FA4066CL003ON
Product family	NINIO
Diffuser	Opal PMMA
Control Gear	Built-in ECG
Options for Dimming Control	On-Off
Height	70 mm


Electrical data

Consumption	37.81 W
Performance	109.73 lm/W
Ripple	3
Nominal Voltage	230 V

Luminaire Output

Luminous Flux	4149 lm
CRI CCT	927

Light distribution



Safety characteristics

IK	05
IP	68

Temperature Operating Conditions