
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

PURE 50 ASYMMETRIC



Technical drawings

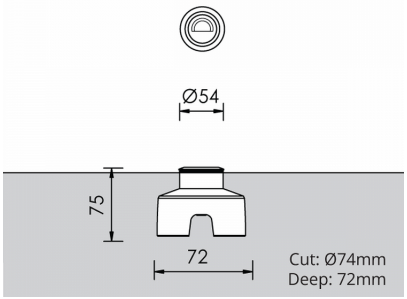

Product Details

CE

Source Type SMD LED

General Information

Housing	Aluminium, Stainless steel
Product code	GR0484CL002ON
Product family	PURE
Diffuser	Clear / Frosted glass
Control Gear	Remote Electronic Driver
Options for Dimming Control	On-Off
Height	75 mm
Diameter	72 mm

Electrical data

Consumption	5 W
Performance	52.4 lm/W
Nominal Voltage	24 V

Luminaire Output

Beam Type	W
Beam	60º
Luminous Flux	262 lm
CRI CCT	927

Light distribution

Safety characteristics

IK	06
IP	67
Protection Class	Class II

Temperature Operating Conditions