
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

PURE 50 ASYMMETRIC



Technical drawings

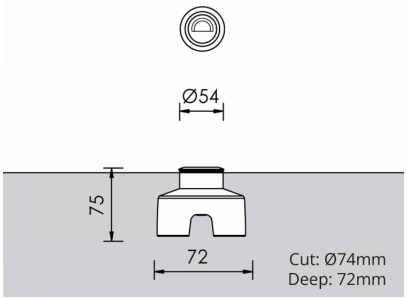

Product Details

CE

Source Type SMD LED

General Information

Housing	Aluminium, Stainless steel
Product code	GR0486CL002DA
Product family	PURE
Diffuser	Clear Glass
Control Gear	Remote Electronic Driver
Options for Dimming Control	DALI2
Height	75 mm
Diameter	72 mm

Electrical data

Consumption	5 W
Performance	52.4 lm/W
Nominal Voltage	24 V

Luminaire Output

Beam Type	N
Beam	15º
Luminous Flux	262 lm
CRI CCT	930

Light distribution

Safety characteristics

IK	06
IP	67
Protection Class	Class II

Temperature Operating Conditions