
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

STRADALE MICRO M



Technical drawings

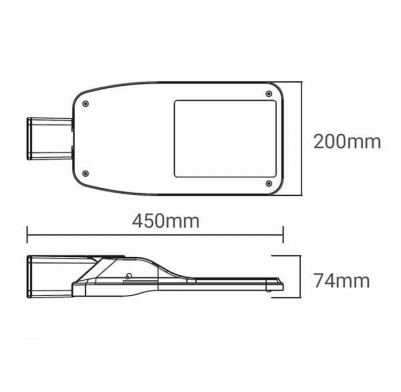

Product Details

CE

Source Type SMD LED

General Information

Product code	ST0789DA
Product family	STRADALE
Options for Dimming Control	DALI2
Width	200 mm
Length	450 mm
Height	74 mm


Electrical data

Consumption	80 W
Performance	130 lm/W

Luminaire Output

Beam Type	II
Luminous Flux	10400 lm
CRI CCT	740

Light distribution



Safety characteristics

IK	10
IP	66
Protection Class	Class II

Temperature Operating Conditions