
BENE 5F Q SPOT



Technical drawings

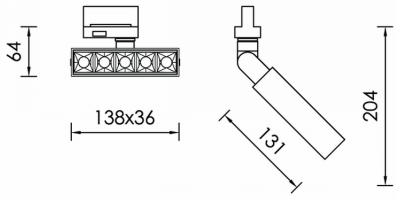

Product Details

CE LM80 LM79 TM21 REACH Source Type Linear LED

General Information

Housing	Aluminium
Product code	SP0116CL002DAC
Product family	BENE
Diffuser	Lens
Control Gear	Built-in ECG
Options for Dimming Control	DALI2
Options for Wireless Dimming	Casambi
Width	36 mm
Length	138 mm
Height	131 mm


Electrical data

Consumption	7,6 W
Performance	95.13 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	6 V

Luminaire Output

Beam Type	N
Beam	15º
Luminous Flux	723 lm
CRI CCT	930
Glare Indicator Ugr Longwise Optics	6
Glare Indicator Ugr Parallel Optics	5

Light distribution

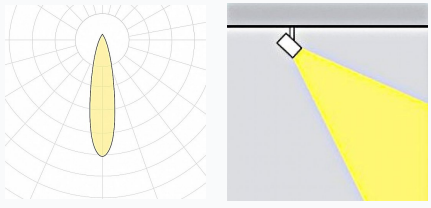

Safety characteristics

IK	04
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%