
BENE 5F Q SPOT



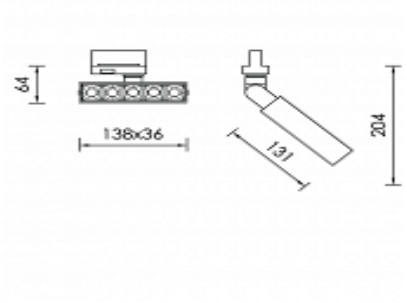

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	SP0121CL003DAC
Product family	BENE
Diffuser	Lens
Control Gear	Built-in ECG
Width	36
Length	138
Height	131


Electrical data


Consumption	5,2
Performance	110.8
Ripple	3
Power Factor	0.96
Nominal Voltage	6


Luminaire Output

Beam Type	N
Beam	15º
Luminous Flux	554
CRI CCT	940
Glare Indicator Ugr Longwise Optics	6
Glare Indicator Ugr Parallel Optics	4

Light distribution







Safety characteristics

IK	04
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%