
BENE 5F Q SPOT



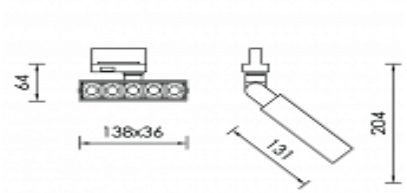

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	SP0125CL002DAC
Product family	BENE
Diffuser	Lens
Control Gear	Built-in ECG
Width	36
Length	138
Height	131


Electrical data

Consumption	5,2
Performance	110.8
Ripple	3
Power Factor	0.96
Nominal Voltage	6

Luminaire Output

Beam Type	W
Beam	45º
Luminous Flux	554
CRI CCT	940
Glare Indicator Ugr Longwise Optics	12
Glare Indicator Ugr Parallel Optics	10

Light distribution

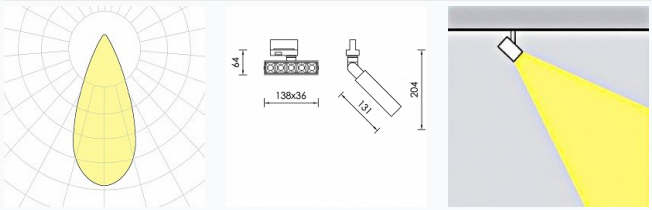

Safety characteristics

IK	04
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%