
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VELOX 5 Q



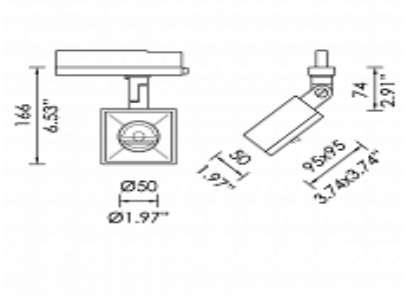

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	SP0128CL001DA
Product family	VELOX
Diffuser	
Control Gear	Built-in ECG
Width	95
Length	95
Height	50


Electrical data

Consumption	21,1
Performance	89.52
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	ASY
Luminous Flux	1880
CRI CCT	935

Light distribution

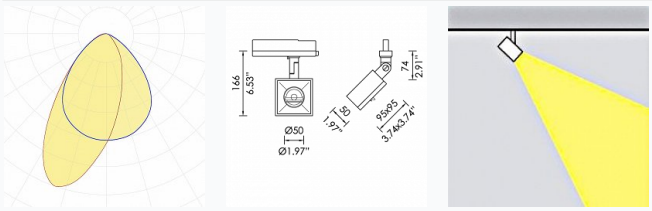

Safety characteristics

IK	02
IP	40
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%