
POTIS T FOCUS



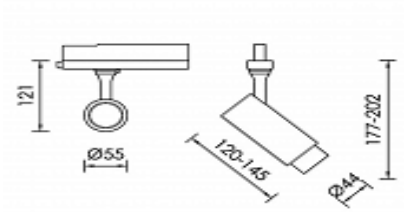

Product Details

CE LM80 LM79 TM21 REACH ENEC

Source Type COB LED

General Information

Housing	Aluminium
Product code	SP0550CL003DAC
Product family	POTIS
Diffuser	Safety Glass Clear
Control Gear	Built-in ECG
Height	145
Diameter	55


Electrical data


Consumption	11,4
Performance	87.27
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	XW
Beam	60º
Luminous Flux	960
CRI CCT	930
Glare Indicator Ugr Longwise Optics	27
Glare Indicator Ugr Parallel Optics	27

Light distribution







Safety characteristics

IK	07
IP	20
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%