
POTIS D FOCUS



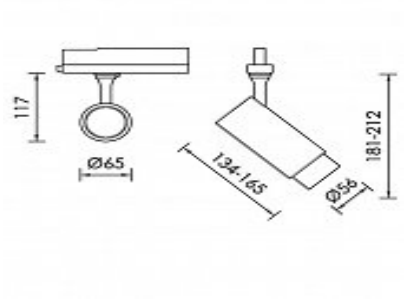

Product Details

CE LM80 LM79 TM21 REACH ENEC

Source Type COB LED

General Information

Housing	Aluminium
Product code	SP0628CL003DAC
Product family	POTIS
Diffuser	Safety Glass Clear
Control Gear	Built-in ECG
Height	165
Diameter	65


Electrical data


Consumption	26,3
Performance	65.38
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	NM
Beam	24º
Luminous Flux	1700
CRI CCT	935
Glare Indicator Ugr Longwise Optics	23
Glare Indicator Ugr Parallel Optics	23

Light distribution







Safety characteristics

IK	07
IP	20
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%