
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

POTIS D FOCUS



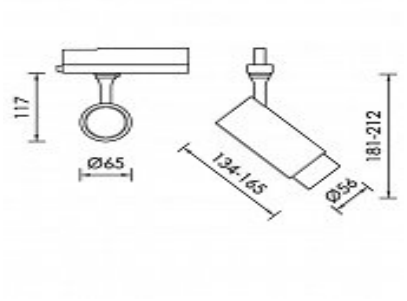

Product Details

CE LM80 LM79 TM21 REACH ENEC

Source Type COB LED

General Information

Housing	Aluminium
Product code	SP0631CL001DA
Product family	POTIS
Diffuser	Safety Glass Clear
Control Gear	Built-in ECG
Height	165
Diameter	65


Electrical data


Consumption	14,5
Performance	94.29
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	M
Beam	36º
Luminous Flux	1320
CRI CCT	930
Glare Indicator Ugr Longwise Optics	25
Glare Indicator Ugr Parallel Optics	25

Light distribution







Safety characteristics

IK	07
IP	20
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%