
FUSUS SPOT



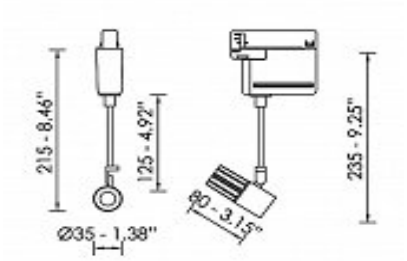

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	SP0684CL001DAC
Product family	FUSUS
Diffuser	Reflector
Control Gear	Remote Electronic Driver
Height	80
Diameter	35


Electrical data


Consumption	6,7
Performance	106.33
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	NM
Beam	20º
Luminous Flux	638
CRI CCT	930
Glare Indicator Ugr Longwise Optics	27
Glare Indicator Ugr Parallel Optics	27

Light distribution







Safety characteristics

IK	05
IP	20
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%