
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

UBER 1 ADTR



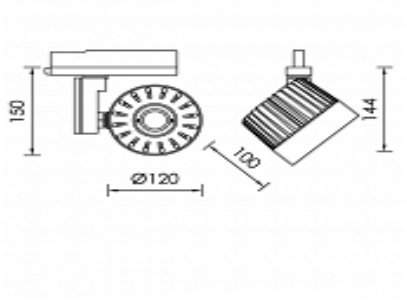

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	SP0695CL002ON
Product family	UBER
Diffuser	Lens
Control Gear	Built-in ECG
Height	100
Diameter	120


Electrical data

Consumption	12,9
Performance	120.08
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	XW
Beam	60º
Luminous Flux	1441
CRI CCT	930

Light distribution

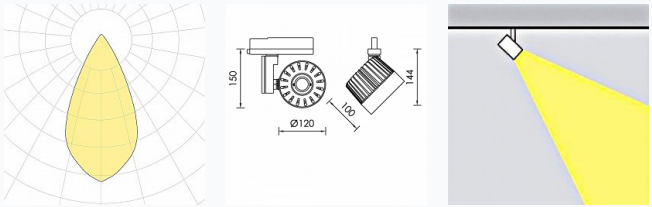

Safety characteristics

IK	04
IP	40
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%