
UBER 1 ADTR



Technical drawings

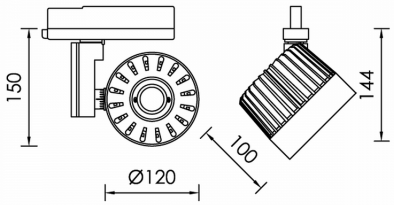

Product Details

CE LM80 LM79 TM21 REACH Source Type COB LED

General Information

Housing	Aluminium
Product code	SP0701CL003DAC
Product family	UBER
Diffuser	Lens
Control Gear	Built-in ECG
Height	100 mm
Diameter	120 mm


Electrical data


Consumption	46,7 W
Performance	103.13 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	230 V

Luminaire Output

Beam Type	XW
Beam	60º
Luminous Flux	4744 lm
CRI CCT	930

Light distribution





Safety characteristics

IK	04
IP	40
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%