
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VINCO TR



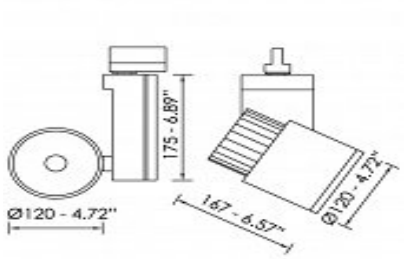

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	SP0905CL001ON
Product family	VINCO
Diffuser	Clear Polycarbonate
Control Gear	Built-in ECG
Height	167
Diameter	120


Electrical data


Consumption	12,8
Performance	116.64
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	N
Beam	15º
Luminous Flux	1458
CRI CCT	930

Light distribution







Safety characteristics

IK	07
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%