
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VINCO A ADTR



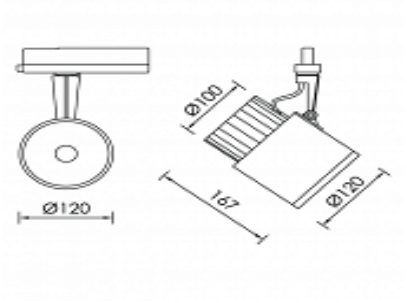

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	SP1063CL002DA
Product family	VINCO
Diffuser	Clear Polycarbonate
Control Gear	Built-in ECG
Height	167
Diameter	120


Electrical data


Consumption	34,2
Performance	109.91
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	XW
Beam	60º
Luminous Flux	3737
CRI CCT	930
Glare Indicator Ugr Longwise Optics	26
Glare Indicator Ugr Parallel Optics	26

Light distribution







Safety characteristics

IK	07
IP	20
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%