
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

PENDO M 1R TR3



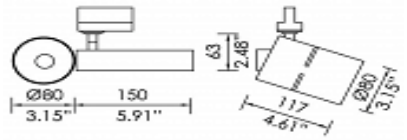

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	SP1519CL003ON
Product family	PENDO
Diffuser	Reflector
Control Gear	Built-in ECG
Height	117
Diameter	80


Electrical data


Consumption	12,8
Performance	124.33
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	N
Beam	15º
Luminous Flux	1492
CRI CCT	930
Glare Indicator Ugr Longwise Optics	21
Glare Indicator Ugr Parallel Optics	21

Light distribution







Safety characteristics

IK	07
IP	20

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%