
SALUS 7 H



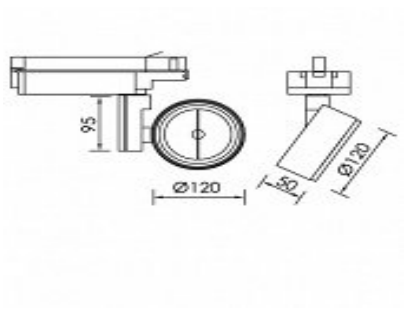

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	SP1551CL002DAC
Product family	SALUS
Diffuser	
Control Gear	
Height	50
Diameter	120


Electrical data


Consumption	11,7
Performance	115.05
Ripple	3
Power Factor	0.96
Nominal Voltage	230


Luminaire Output

Beam Type	UN
Beam	8º
Luminous Flux	1265.5
CRI CCT	930
Glare Indicator Ugr Longwise Optics	8
Glare Indicator Ugr Parallel Optics	8

Light distribution







Safety characteristics

IK	02
IP	20
Protection Class	Class I

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%