
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VENTUS 2P ADTR



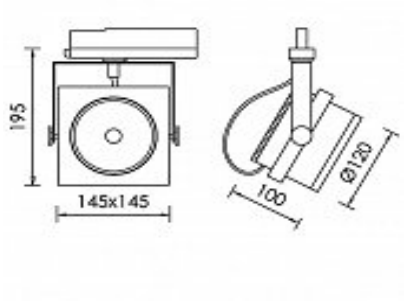

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	SP1646CL003DAC
Product family	VENTUS
Diffuser	Clear Polycarbonate
Control Gear	Built-in ECG
Width	145
Length	145
Height	100


Electrical data

Consumption	40,4
Performance	106.98
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	N
Beam	15º
Luminous Flux	4279
CRI CCT	930

Light distribution

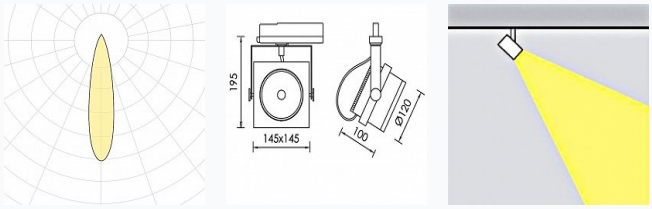

Safety characteristics

IK	07
IP	20
Protection Class	Class II

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%