
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

LEGATUS LINEAR LED



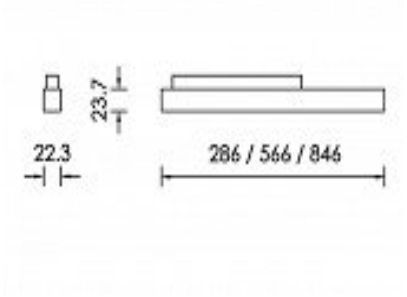

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	LV0067CL002DAC
Product family	LEGATUS
Diffuser	PMMA
Control Gear	Built-in ECG
Width	22
Length	285
Height	24


Electrical data

Consumption	6
Performance	91
Ripple	3
Power Factor	0.96
Nominal Voltage	48

Luminaire Output

Beam Type	VW
Beam	108º
Luminous Flux	546
CRI CCT	927
Glare Indicator Ugr Longwise Optics	28
Glare Indicator Ugr Parallel Optics	28

Light distribution

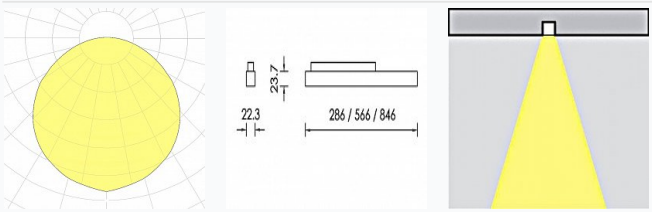

Safety characteristics

IK	05
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%