
# LEGATUS LINEAR SPOT



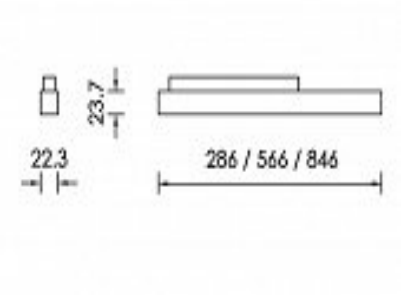


## Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | LV0096CL002DA |
| Product family | LEGATUS |
| Diffuser | Reflector |
| Control Gear | Built-in ECG |
| Width | 22.3 |
| Length | 850 |
| Height | 23.7 |


### Electrical data

| | |
|---|---|
| Consumption | 15,2 |
| Performance | 114 |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 48 |

### Luminaire Output

| | |
|---|---|
| Beam Type | NM |
| Beam | 20º |
| Luminous Flux | 1710 |
| CRI CCT | 927 |
| Glare Indicator Ugr Longwise Optics | 12 |
| Glare Indicator Ugr Parallel Optics | 13 |

### Light distribution

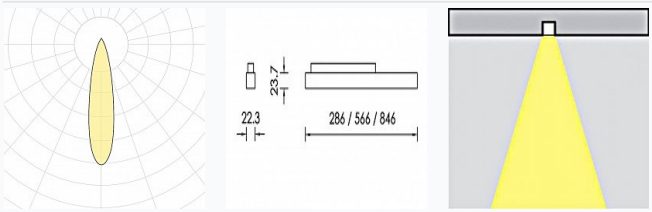


### Safety characteristics

| | |
|---|---|
| IK | 05 |
| IP | 40 |
| Protection Class | Class III |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >60.000h L80B10@35°C |
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |