
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

LEGATUS POTIS N



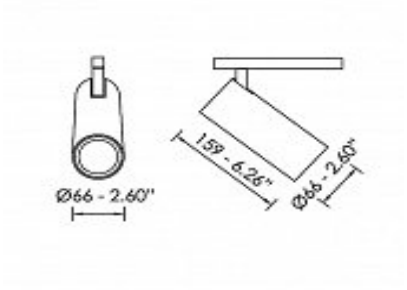

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	LV0215CL002DA
Product family	LEGATUS
Diffuser	Safety Glass Clear
Control Gear	Built-in ECG
Height	159
Diameter	66


Electrical data


Consumption	20,4
Performance	110
Ripple	3
Power Factor	0.96
Nominal Voltage	48


Luminaire Output

Beam Type	NM
Beam	23º
Luminous Flux	2200
CRI CCT	935
Glare Indicator Ugr Longwise Optics	20
Glare Indicator Ugr Parallel Optics	20

Light distribution







Safety characteristics

IK	07
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%