
# LEGATUS LOCUS SP H.P.LED



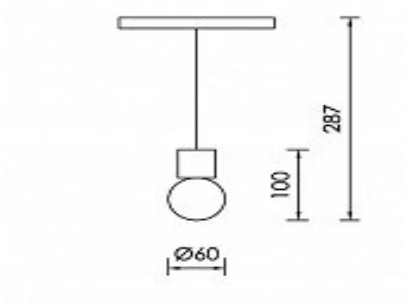


## Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | LV0257CL003DA |
| Product family | LEGATUS |
| Diffuser | Opal Glass |
| Control Gear | Built-in ECG |
| Height | 100 |
| Diameter | 60 |


### Electrical data


| | |
|---|---|
| Consumption | 1,1 |
| Performance | 76.82 |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 48 |


### Luminaire Output

| | |
|---|---|
| Beam Type | VW |
| Beam | 161º |
| Luminous Flux | 84.5 |
| CRI CCT | 927 |
| Glare Indicator Ugr Longwise Optics | 20 |
| Glare Indicator Ugr Parallel Optics | 20 |

### Light distribution





### Safety characteristics

| | |
|---|---|
| IK | 02 |
| IP | 20 |
| Protection Class | Class III |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >60.000h L80B10@35°C |
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |