
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

LEGATUS 35 SHADE



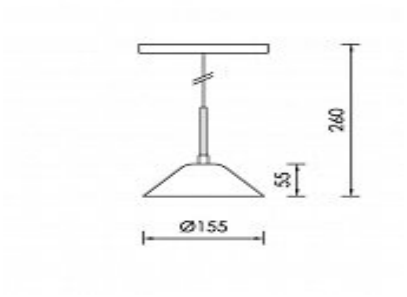

Product Details

CE LM80 LM79 TM21 REACH

Source Type Linear LED

General Information

Housing	Aluminium
Product code	LV0279CL002
Product family	LEGATUS
Diffuser	
Control Gear	Built-in ECG
Height	55
Diameter	155


Electrical data

Consumption	6,2
Performance	97.5
Ripple	3
Power Factor	0.96
Nominal Voltage	48

Luminaire Output

Beam Type	NM
Beam	20º
Luminous Flux	585
CRI CCT	930

Light distribution

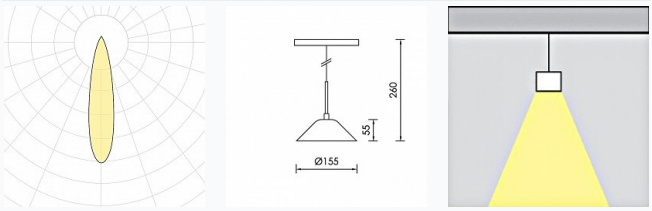

Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>50.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%