
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

LEGATUS POTIS T FOCUS LED



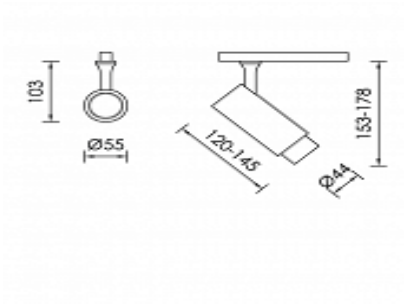

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	LV0395CL002
Product family	LEGATUS
Diffuser	Safety Glass Clear
Control Gear	Built-in ECG
Height	145
Diameter	55


Electrical data


Consumption	13,5
Performance	83.85
Ripple	3
Power Factor	0.96
Nominal Voltage	48


Luminaire Output

Beam Type	M
Beam	36º
Luminous Flux	1090
CRI CCT	930
Glare Indicator Ugr Longwise Optics	25
Glare Indicator Ugr Parallel Optics	25

Light distribution







Safety characteristics

IK	07
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%