
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

LEGATUS SPOT 25 L



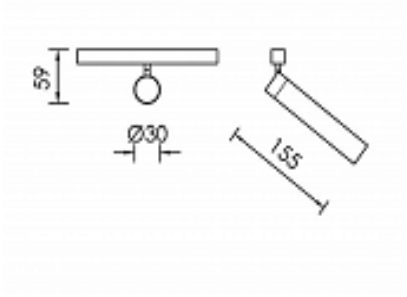

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	LV0476CL003
Product family	LEGATUS
Diffuser	
Control Gear	Built-in ECG
Height	155
Diameter	30


Electrical data


Consumption	3,89
Performance	131.67
Ripple	3
Power Factor	0.96
Nominal Voltage	48


Luminaire Output

Beam Type	NM
Beam	25º
Luminous Flux	395
CRI CCT	940

Light distribution







Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%