
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

BENE 2F TRIMLESS



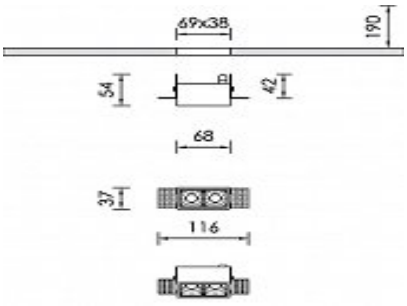

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	DL0157CL003DAC
Product family	BENE
Diffuser	PMMA
Control Gear	Remote Electronic Driver
Width	37
Length	68
Height	54


Electrical data

Consumption	2,2
Performance	88.18
Ripple	3
Power Factor	0.96
Nominal Voltage	6

Luminaire Output

Beam Type	W
Beam	45º
Luminous Flux	194
CRI CCT	927
Glare Indicator Ugr Longwise Optics	11
Glare Indicator Ugr Parallel Optics	9

Light distribution

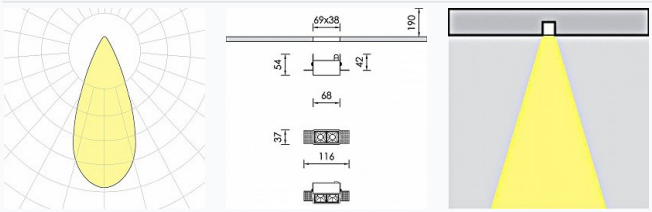

Safety characteristics

IK	04
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%