
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

VATES 21 LED



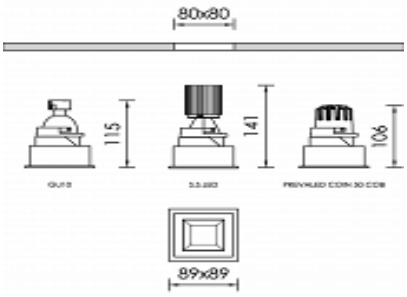

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium, Plastic
Product code	DL0519CL001DAC
Product family	VATES
Diffuser	Reflector
Control Gear	
Width	89
Length	89
Height	141


Electrical data


Consumption	7,6
Performance	66.86
Ripple	3
Power Factor	0.96
Nominal Voltage	34.6


Luminaire Output

Beam Type	NM
Beam	24º
Luminous Flux	468
CRI CCT	930

Light distribution







Safety characteristics

IK	04
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%