

# LEGATUS SPOT 20 IN

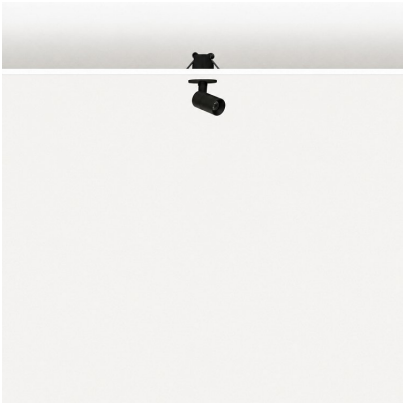

## Technical drawings

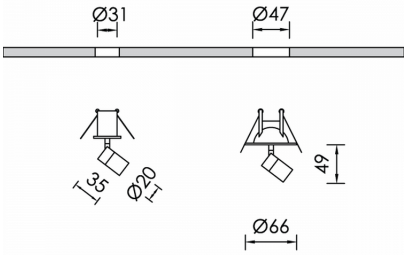


## Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

### General Information

| | |
|---|---|
| Housing | Aluminium |
| Product code | DL0591CL004ON |
| Product family | LEGATUS SPOT |
| Diffuser | |
| Control Gear | Remote Electronic Driver |
| Height | |


### Electrical data


| | |
|---|---|
| Consumption | 1,11 W |
| Performance | 115 lm/W |
| Ripple | 3 |
| Power Factor | 0.96 |
| Nominal Voltage | 3 V |

### Luminaire Output

| | |
|---|---|
| Beam Type | NM |
| Beam | 20º |
| Luminous Flux | 115 lm |
| CRI CCT | 927 |

### Light distribution





### Safety characteristics

| | |
|---|---|
| IK | 05 |
| IP | 20 |
| Protection Class | Class III |

### Temperature Operating Conditions

| | |
|---|---|
| Lifetime | >60.000h L80B10@35°C |
| Operating Ambient Temperature | -10...+45°C |
| Operating Humidity Level | 5...95% |