
LEGATUS SPOT 25 IN



Technical drawings

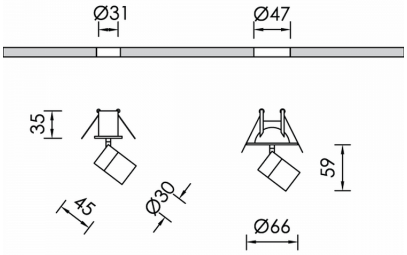

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	DL0603CL002DAC
Product family	LEGATUS SPOT
Diffuser	
Control Gear	Remote Electronic Driver
Height	


Electrical data


Consumption	3,89 W
Performance	124.67 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	34.6 V

Luminaire Output

Beam Type	NM
Beam	25º
Luminous Flux	374 lm
CRI CCT	930

Light distribution





Safety characteristics

IK	05
IP	20
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%