
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

STELLA 4 LED



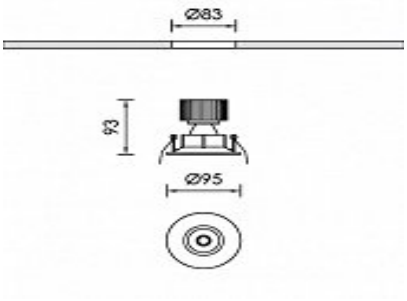

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	DL0799CL001DAC
Product family	STELLA
Diffuser	
Control Gear	Remote Electronic Driver
Height	93
Diameter	95


Electrical data


Consumption	8,3
Performance	104.58
Ripple	3
Power Factor	0.96
Nominal Voltage	34.6


Luminaire Output

Beam Type	NM
Beam	24º
Luminous Flux	868
CRI CCT	940
Glare Indicator Ugr Longwise Optics	18
Glare Indicator Ugr Parallel Optics	18

Light distribution







Safety characteristics

IK	05
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%