
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

STELLA 4 LED



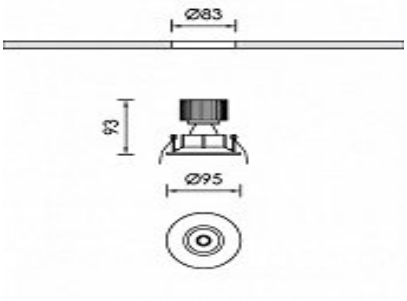

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	DL0844CL002DAC
Product family	STELLA
Diffuser	
Control Gear	Remote Electronic Driver
Height	93
Diameter	95


Electrical data

Consumption	10,8
Performance	105.28
Ripple	3
Power Factor	0.96
Nominal Voltage	34.6

Luminaire Output

Beam Type	ASY
Beam	-
Luminous Flux	1137
CRI CCT	940
Glare Indicator Ugr Longwise Optics	28
Glare Indicator Ugr Parallel Optics	28

Light distribution

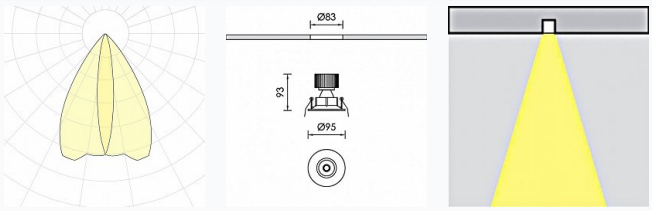

Safety characteristics

IK	05
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%