
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

STELLA 5 LED



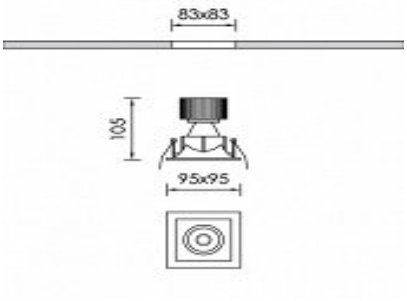

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	DL0921CL001DAC
Product family	STELLA
Diffuser	
Control Gear	Remote Electronic Driver
Width	95
Length	95
Height	105


Electrical data


Consumption	10
Performance	100.9
Ripple	3
Power Factor	0.96
Nominal Voltage	34.6


Luminaire Output

Beam Type	ASY
Beam	-
Luminous Flux	1009
CRI CCT	930

Light distribution







Safety characteristics

IK	05
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%