
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

STELLA 6 FUSUS

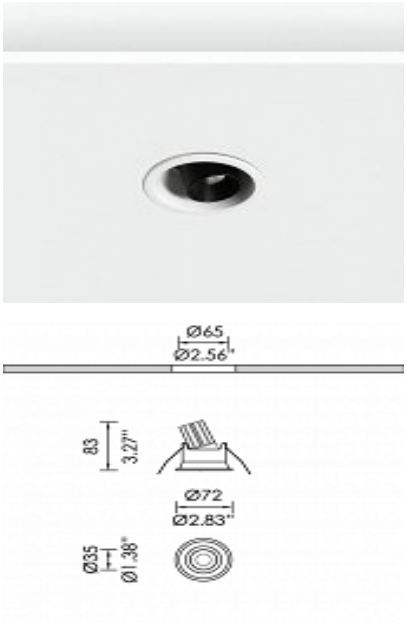

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	DL0989CL003DAC
Product family	STELLA
Diffuser	
Control Gear	Remote Electronic Driver
Height	83
Diameter	72


Electrical data

Consumption	6
Performance	95.33
Ripple	3
Power Factor	0.96
Nominal Voltage	34.6

Luminaire Output

Beam Type	NM
Beam	20º
Luminous Flux	572
CRI CCT	930
Glare Indicator Ugr Longwise Optics	24
Glare Indicator Ugr Parallel Optics	24

Light distribution

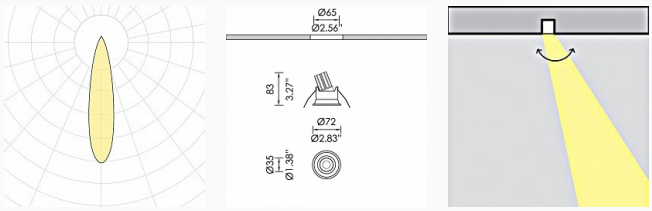

Safety characteristics

IK	05
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%