
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

STELLA H.P.LED

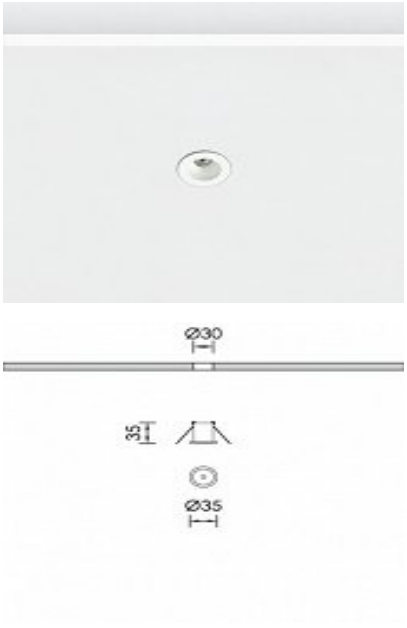

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	DL1001CL003DAC
Product family	STELLA
Diffuser	
Control Gear	Remote Electronic Driver
Height	35
Diameter	35


Electrical data

Consumption	1,1
Performance	107.5
Ripple	3
Power Factor	0.96
Nominal Voltage	3

Luminaire Output

Beam Type	UN
Beam	8º
Luminous Flux	107.5
CRI CCT	927
Glare Indicator Ugr Longwise Optics	8
Glare Indicator Ugr Parallel Optics	8

Light distribution

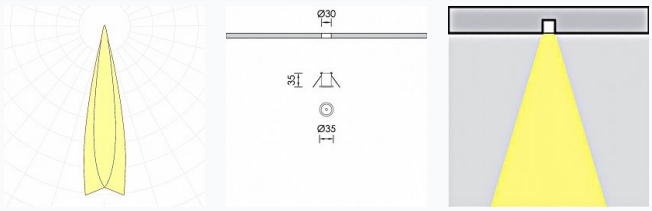

Safety characteristics

IK	05
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%