

STELLA H.P.LED

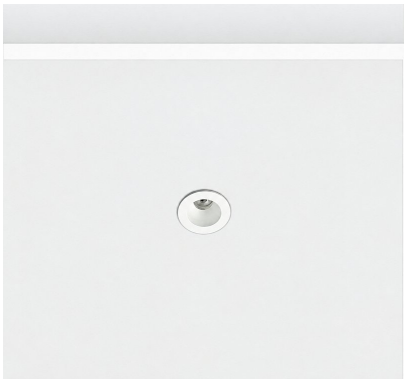

Technical drawings

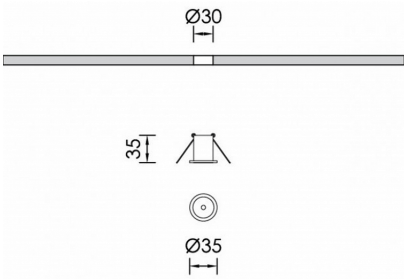

Product Details

CE LM80 LM79 TM21 REACH Source Type H.P. LED

General Information

Housing	Aluminium
Product code	DL1001CL007DAC
Product family	STELLA
Diffuser	
Control Gear	Remote Electronic Driver
Height	35 mm
Diameter	35 mm


Electrical data

Consumption	1,1 W
Performance	98.18 lm/W
Ripple	3
Power Factor	0.96
Nominal Voltage	3 V

Luminaire Output

Beam Type	UN
Beam	8º
Luminous Flux	108 lm
CRI CCT	927
Glare Indicator Ugr Longwise Optics	8
Glare Indicator Ugr Parallel Optics	8

Light distribution

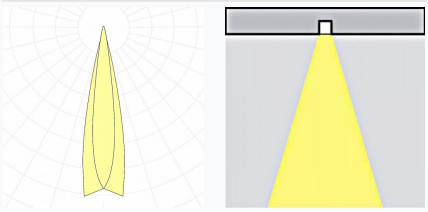

Safety characteristics

IK	05
IP	40
Protection Class	Class III

Temperature Operating Conditions

Lifetime	>60.000h L80B10@35°C
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%