HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

RITUS 40





Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	DL1459CL002DA
Product family	RITUS
Diffuser	
Control Gear	Remote Electronic Driver
Height	70
Diameter	43


Electrical data

Consumption	8
Performance	71.88
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	NM
Beam	24º
Luminous Flux	575
CRI CCT	927
Glare Indicator Ugr Longwise Optics	17
Glare Indicator Ugr Parallel Optics	17

Light distribution

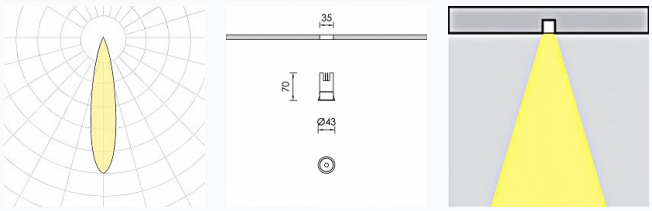

Safety characteristics

IK	04
IP	54
Protection Class	Class III

Temperature Operating Conditions

Lifetime	20.000h
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%