
HEADOFFICE: Showroom 13 Sofokli Venizelou Ave., Likovrisi, P.O. Box 14123, Athens, Greece Tel: (+30) 210 2851 304 I www.bright.gr I info@bright.gr

RITUS 50



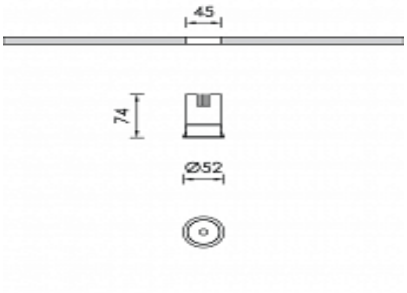

Product Details

CE LM80 LM79 TM21 REACH

Source Type COB LED

General Information

Housing	Aluminium
Product code	DL1460CL001ON
Product family	RITUS
Diffuser	
Control Gear	Remote Electronic Driver
Height	74
Diameter	52


Electrical data

Consumption	8
Performance	100.13
Ripple	3
Power Factor	0.96
Nominal Voltage	230

Luminaire Output

Beam Type	M
Beam	30º
Luminous Flux	801
CRI CCT	927
Glare Indicator Ugr Longwise Optics	16
Glare Indicator Ugr Parallel Optics	16

Light distribution

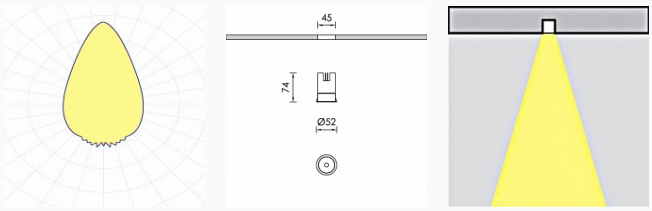

Safety characteristics

IK	04
IP	54
Protection Class	Class III

Temperature Operating Conditions

Lifetime	20.000h
Operating Ambient Temperature	-10...+45°C
Operating Humidity Level	5...95%